

(8981/大四P)型条形连接器 Pressure Welding Bar Connector



间距 Pitch: 5.08mm(.200")




技术参数 Specifications

- 线数 Poles: 2、3、4
- 适用线规 Applicable wires: AWG24#~18#
- 适应基板厚度 Applicable PC board thickness: 1.6mm
- 温度范围 Temperature range: -25℃~85℃
- 额定电压 Voltage rating: 250V.Ac/Dc
- 额定电流 Current rating: 5A
- 接触电阻 Contact resistance: $\leq 0.01 \Omega$
- 绝缘电阻 Insulation resistance: $\geq 1000M \Omega$
- 耐压 Withstand voltage: 1500V.Ac/1min
- 材料 Material:
 - 插头 Plug housing: 尼龙(PA66) UL94V-2
 - 插座 Receptacle housing: 尼龙(PA66) UL94V-2
 - 针座 Wafer: 尼龙(PA66) UL94V-2
 - 端子 Terminal: 磷青铜 Phos.bronze Tin/plated


端子 Terminal

型号 Type	适用线规 Applicable wires		电线外径 O.D of wire ins
	mm ²	AWG#	mm
8980/大四P-PT	0.2-0.83	24-18	1.3-2.5
8980/大四P-RT	0.2-0.83	24-18	1.3-2.5


8980/大四P-PT



8980/大四P-RT



安装尺寸 Mounting Measurement

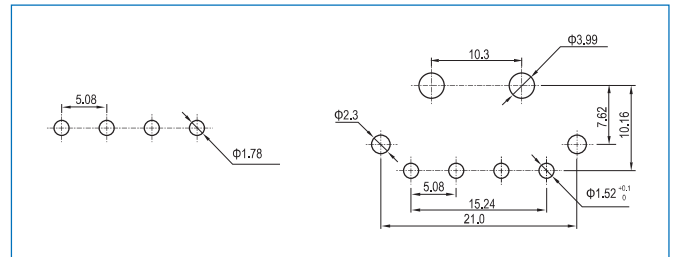

线数 Poles	额定电压 Voltage rating	额定电流 Current rating	插头 Plug housing	插座 Receptacle housing	针座 Wafer
2	250V	5A	8981/大四P-2P 	8981/大四P-2R 	8981/大四P-2A
			8981/大四P-3P 	8981/大四P-3R 	8981/大四P-3A
			8981/大四P-4P 	8981/大四P-4R 	8981/大四P-4A
4	250V	5A			8981/大四P-4WA